


SPECIFICATIONS

- Frequency: DC – 4 GHz
- Power: 25 W
- VSWR: 1.20 max
- Impedance: $50\Omega \pm 5\%$
- Connector: Type-N, male
- Temperature: -55°C to 125°C
- Standards: MIL-DTL-39030
- Lead-Free, RoHS certified

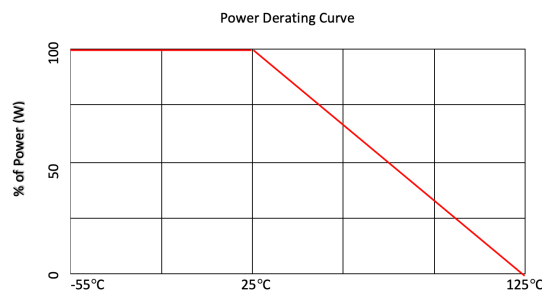

MECHANICAL OUTLINE

Dim: Inch [mm]

