


DATE	SYM	REVISION RECORD	AUTH	DRAWN

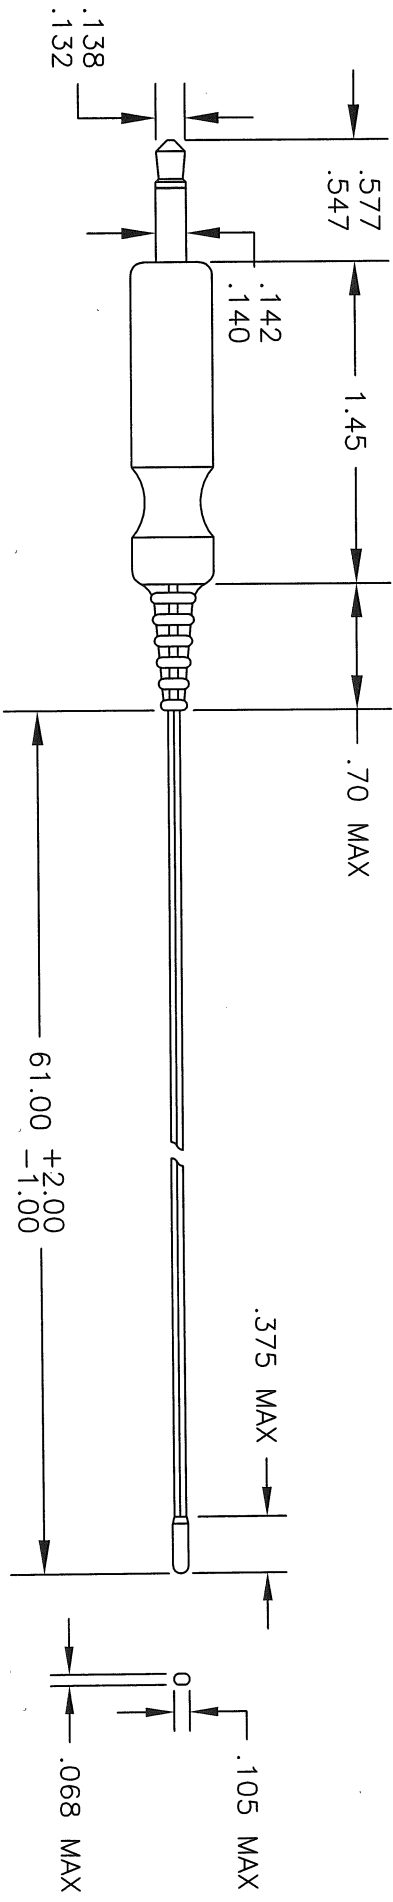


NOTES:

1. THERMISTOR:

TEMP °C	RESISTANCE (OHMS)		
	MIN	NOM	MAX
30	8002	8037	8071
33	7041	7070	7100
37	5956	5981	6006
40	5268	5289	5311

- MALE PLUG: BRIGHT NICKEL PLATED BRASS,  
3.5MM NOMINAL MINIATURE PLUG, 2-CONDUCTOR.
- RIBBON CABLE: 30 AWG, (7x38), WHITE MEDICAL  
GRADE PVC INSULATION,  
.037" x .069" DIMENSIONS.
- TIP: MOLDED WHITE ABS.

TOLERANCES (EXCEPT AS NOTED)		 <b>GE Sensing &amp; Inspection</b> <b>Thermometrics</b>		<b>COMPANY</b> <b>CONFIDENTIAL</b>	
DECIMAL .XX = .03 .XXX = .005	ALL DIMENSIONS IN INCHES (EXCEPT AS NOTED)	SCALE N/A	DRAWN BY <b>JRL</b>		
FRACTIONAL ± 1/64	TITLE <b>THERMISTOR ASSEMBLY</b>	INITIAL RELEASE	DRAWING NUMBER <b>A341C GENERIC</b>	REV	
ANGULAR ± 1°					

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO GE Sensing & Inspection, AND SHALL NOT BE DISCLOSED IN WHOLE OR IN PART IN ANY FORM OR FOR ANY REASON EXCEPT AS EXPRESSLY STATED IN WRITING BY GE Sensing & Inspection.