



R36AS

AC Operated RVDT for Harsh Environments

SPECIFICATIONS

- AC operation
- ± 60 degree angular sensing range
- Non-contact electrical design
- Wide operating temperature range
- Size 15 servo mount
- Stainless steel housing
- MS style hermetic connector

The **R36AS RVDT** (Rotary Variable Differential Transformer) is an angular position sensor that incorporates a proprietary non-contact design which dramatically improves long term reliability when compared to other traditional rotary devices such as synchros, resolvers and potentiometers. This unique design eliminates assemblies that degrade over time such as slip rings, rotor windings, contact brushes and wipers, without sacrificing accuracy.

High reliability and performance are achieved through the use of a specially shaped rotor and wound stator coil that together simulate the operation of a Linear Variable Differential Transformer (LVDT). Rotational movement of the rotor shaft results in a linear change in the amplitude of the output signal, directly proportional to the shaft angle change, while the phase of this signal indicates the direction of displacement from the null point. Non-contact electromagnetic coupling of the rotor provide infinite resolution.

AC operation eliminates the need for integrated signal conditioning components, thereby offering the user a very wide operating temperature range of -55°C to $+150^{\circ}\text{C}$. Factory calibrated to operate over a ± 30 degree range, the R36AS offers a non-linearity of less than $\pm 0.5\%$ of full range. Extended range operation up to a maximum of ± 60 degrees is possible with increased non-linearity.

Packaged in Size 15 servo mount stainless steel housing, an MS style hermetic connector, and a shaft seal, the R36AS is the perfect choice for angular position sensing in harsh environments.

FEATURES

- High accuracy
- Infinite resolution
- Long term reliability
- Wide -55° to $+150^{\circ}\text{C}$ operating temp range
- Rugged stainless steel housing
- Shielded ABEC 3 precision bearings

APPLICATIONS

- Valve position
- Machine tool equipment
- Rotary actuator feedback
- Dancer arm position
- Process control

PERFORMANCE SPECIFICATIONS

ELECTRICAL SPECIFICATIONS						
Parameter	@2.5kHz Input Frequency <i>(recommended)</i>			@10kHz Input Frequency		
Angular range, degrees	±30°	±45°	±60°	±30°	±45°	±60°
Non-linearity, % of FR	±0.5%	±1%	±3%	±0.5%	±1%	±3%
Output at range ends (*)	66mV/V	99mV/V	132mV/V	51 mV/V	76 mV/V	102 mV/V
Sensitivity	2.2 mV/V/degree			1.7 mV/V/degree		
Temp coefficient of sensitivity	0.02%/°F [0.036%/°C] +20 to +160°F [-7 to +71°C]			Not specified		
Input / Output impedances	750Ω / 2000 Ω			2500Ω / 5400Ω		
Phase shift	+4°			-17°		
Input voltage and frequency	3 VRMS @ 2.5 to 10 kHz (2.5kHz recommended)					
Null voltage	0.5% of FRO, maximum					
ENVIRONMENTAL AND MECHANICAL SPECIFICATIONS						
Operating temperature	-67°F to +300°F [-55°C to 150°C]					
Mechanical angular range	360 degrees (no stops)					
Bearings	Shielded ABEC 3 precision					
Shaft diameter	3/16 inch [4.75 mm]					
Housing material	AISI 304 stainless steel					
Mounting	Size 15 servo mount per BU-ORD					
Moment of inertia	1.62 x 10 ⁻⁶ inch.lb-force.second ² [1.866 x 10 ⁻⁶ Kg-force.cm.second ²]					
Maximum torque, unbalance	0.012 inch.ounce-force [0.87 gram-force.cm]					
Maximum torque, friction	0.75 inch.ounce-force [54 gram-force.cm]					
Shaft load capability	25 lb [11Kg] Axial or Radial					
Electrical connection	6-pin MS type connector (MIL-C-5015)					
Weight	9 oz [255 Grams]					
IP 60529 rating	IP65					

Notes:

All values are nominal unless otherwise noted


Dimensions are in inch [mm] unless otherwise noted

(*): Unit for output at range ends is millivolt per volt of excitation (input voltage)

FR (Full Range) is the angular range, end to end; 2x A° for ±A° angular range


FRO (Full Range Output): Algebraic difference in outputs measured at the ends of the range

DIMENSIONS

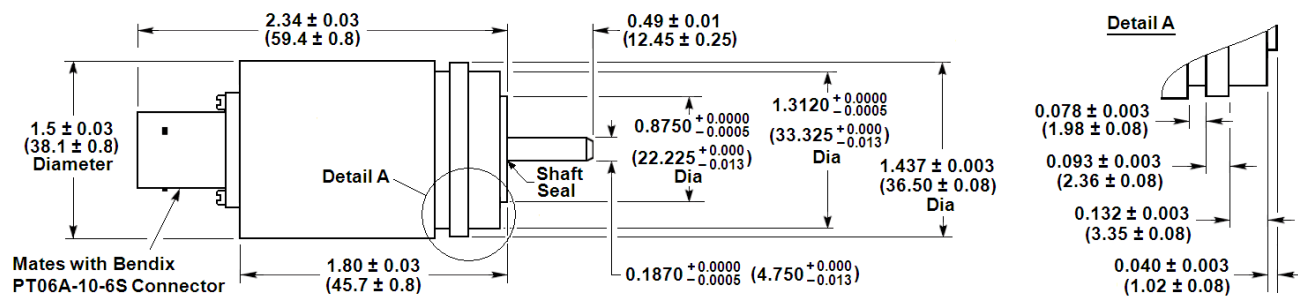

Dimensions are in inch (mm)

WIRING INFORMATION

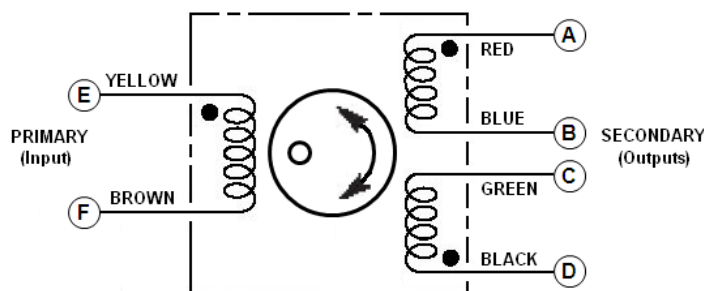

A through F: Connector pin assignments; Connect B to C for differential output

ORDERING INFORMATION

Description	Model	Part Number
RVDT $\pm 30^\circ$, 2.5kHz calibration (standard)	R36AS	02560927-000
RVDT $\pm 45^\circ$, 2.5kHz calibration	R36AS	02560927-045
ACCESSORIES		
Multipurpose coupling kit	R-FLEX	66530072-000
Mating connector kit	PT06A-10-6S(SR)	62101011-000
Interconnect cable for LVM-110/LiM 4-20/CTS 420 Conditioners (1)	R36AS to Stripped/Tinned	04290417-000
Interconnect cable for ATA-2001 Signal Conditioner (1)	R36AS to DB-9P	04290457-000
Interconnect cable for MP2000 Series Set-Point Controller (1)	R36AS to 05BL5M	04290560-000
Interconnect cable for LDM/PML-1000 Signal Conditioners, 200°C (1)	R36AS to Stripped/Tinned	04290595-000

(1) All cables are shielded, 10 foot long, and rated 80°C [176°F] operating unless otherwise noted. Consult factory for other lengths.

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
1000 Lucas Way
Hampton, VA 23666
United States
Phone: +1-800-745-8008
Fax: +1-757-766-4297
Email: customercare.hmp@te.com

EUROPE

MEAS Deutschland GmbH (Europe)
a TE Connectivity Company
Hauert 13
D-44227 Dortmund
Germany
Phone: +49-(0)231-9740-0
Fax: +49-(0)231-9740-20
Email: customercare.dtm@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
No. 26 Langshan Road
Shenzhen High-Tech Park (North)
Nanshan District, Shenzhen 518057
China
Phone: +86-755-33305088
Fax: +86-755-33305099
Email: customercare.shzn@te.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Accustar, American Sensor Technologies, AST, ATEXIS, DEUTSCH, IdentiCal, TruBlue, KPSI, Krystal Bond, Microfused, UltraStable, Measurement Specialties, MEAS, Schaevitz, TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.