

Low Noise and High Dynamic Range Packaged GaAs FETs

FEATURES

- 0.5 dB Typical Noise Figure at 12 GHz
- High Associated Gain: $G_a = 12$ dB Typical at 12 GHz
- 18.5 dBm Typical Power at 12 GHz
- 13 dB Typical Linear Power Gain at 12 GHz
- Breakdown Voltage : $BV_{DGO} \geq 9V$
- $L_g = 0.25 \mu m$, $W_g = 160 \mu m$
- Tight V_p ranges control
- High RF input power handling capability
- 100 % DC Tested
- Applied for frequency up to 24GHz or higher
- Micro-X Metal Ceramic Package, pass hermetic gross sealing test

PHOTO ENLARGEMENT



DESCRIPTION

The TC2181 is a high performance field effect transistor housed in a ceramic micro-x package with TC1101 PHEMT Chip. The TC2181 assembly process did pass the hermetic gross sealing test. It can be used for the applications at frequency up to 24GHz or higher. It has very low noise figure, high associated gain and high dynamic range that makes this device suitable for use in low noise amplifiers. All devices are 100 % DC tested to assure consistent quality.

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ C$)

Symbol	CONDITIONS		MIN	TYP	MAX	UNIT
NF	Noise Figure at $V_{DS} = 2 V$, $I_{DS} = 10 mA$, $f = 12GHz$			0.5	0.7	dB
G_a	Associated Gain at $V_{DS} = 2 V$, $I_{DS} = 10 mA$, $f = 12GHz$		10	12		dB
P_{1dB}	Output Power at 1dB Gain Compression Point, $f = 12 GHz$ $V_{DS} = 6 V$, $I_{DS} = 25 mA$		17.5	18.5		dBm
G_L	Linear Power Gain, $f = 12GHz$ $V_{DS} = 6 V$, $I_{DS} = 25 mA$		11	13		dB
I_{DSS}	Saturated Drain-Source Current at $V_{DS} = 2 V$, $V_{GS} = 0 V$			48		mA
g_m	Transconductance at $V_{DS} = 2 V$, $V_{GS} = 0 V$			55		mS
V_P	Pinch-off Voltage at $V_{DS} = 2 V$, $I_D = 0.32mA$			-1.0*		Volts
BV_{DGO}	Drain-Gate Breakdown Voltage at $I_{DGO} = 0.08mA$		9	12		Volts
R_{th}	Thermal Resistance			250		$^{\circ}C/W$

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ C$)

Symbol	Parameter	Rating
V_{DS}	Drain-Source Voltage	7.0 V
V_{GS}	Gate-Source Voltage	-3.0 V
I_{DS}	Drain Current	I_{DSS}
I_{GS}	Gate Current	160 μA
P_{in}	RF Input Power, CW	18 dBm
P_T	Continuous Dissipation	150 mW
T_{CH}	Channel Temperature	175 $^{\circ}C$
T_{STG}	Storage Temperature	- 65 $^{\circ}C$ to +175 $^{\circ}C$

TYPICAL NOISE PARAMETERS ($T_A = 25^\circ C$)

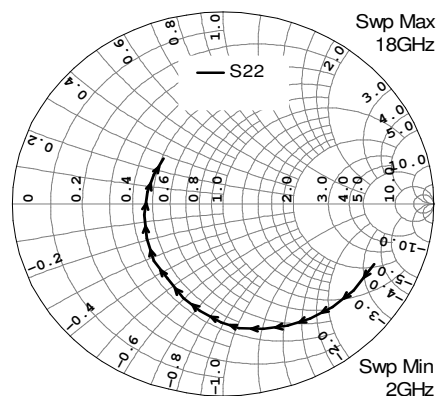
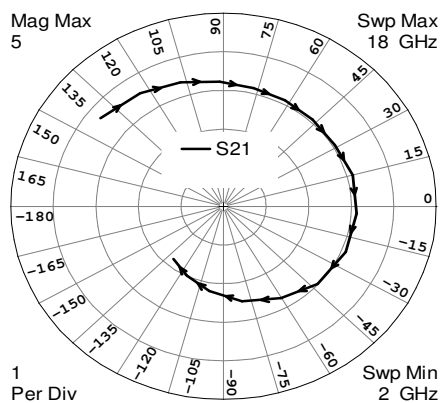
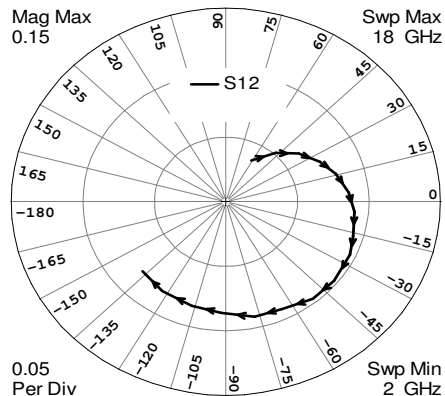
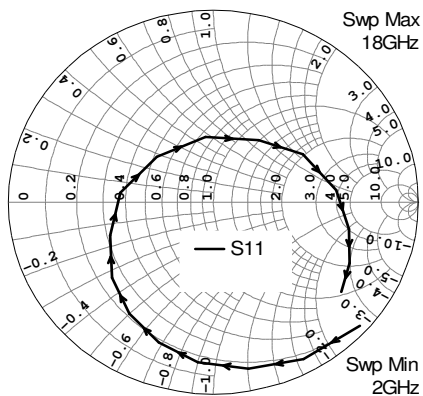
$V_{DS} = 2 V$, $I_{DS} = 10 mA$

Frequency (GHz)	NF_{opt} (dB)	G_a (dB)	Γ_{opt}		Rn/50
			MAG	ANG	
2	0.33	18.4	1.00	15	0.42
4	0.35	16.8	0.86	32	0.36
6	0.37	15.2	0.70	53	0.28
8	0.40	13.8	0.53	79	0.20
10	0.46	12.5	0.39	112	0.12
12	0.52	11.5	0.29	153	0.09
14	0.61	11.0	0.26	202	0.08
16	0.77	10.9	0.32	262	0.11
18	0.95	10.6	0.51	332	0.24

* For the tight control of the pinch-off voltage range, we divide TC2181 into 3 model numbers to fit customer design requirement
 (1)TC2181P0710 : $V_p = -0.7V$ to $-1.0V$ (2)TC2181P0811 : $V_p = -0.8V$ to $-1.1V$ (3)TC2181P0912 : $V_p = -0.9V$ to $-1.2V$

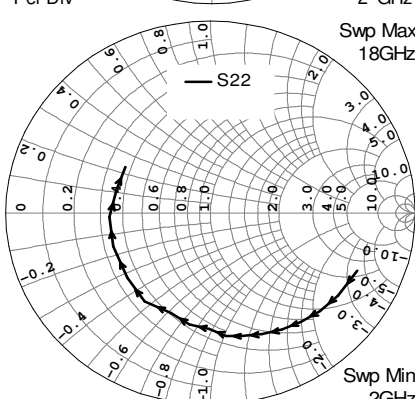
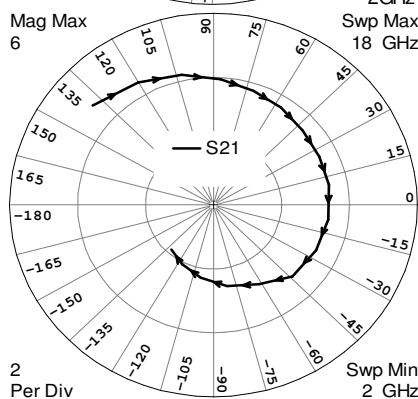
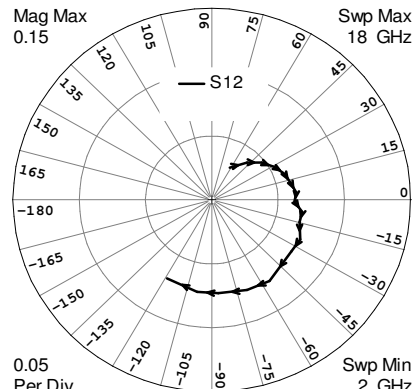
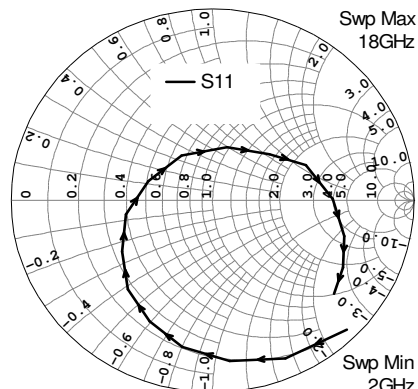
If required, customer can specify the requirement in purchasing document. For special V_p requirement, please contact factory for details.

TYPICAL SCATTERING PARAMETERS (T_A=25 °C)

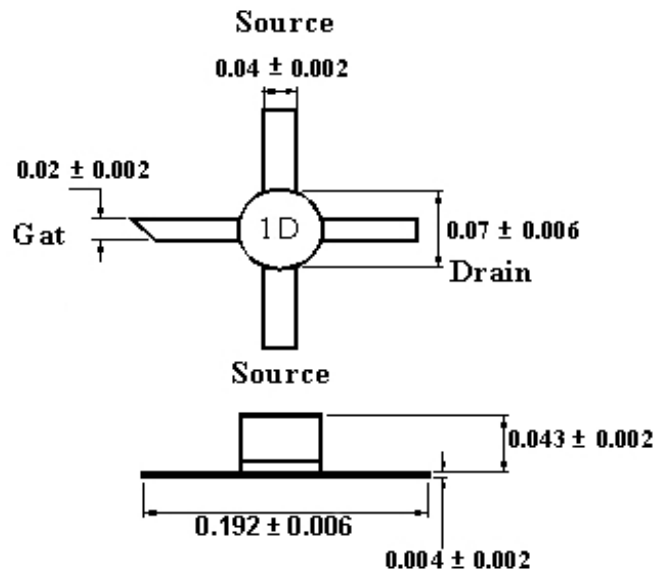
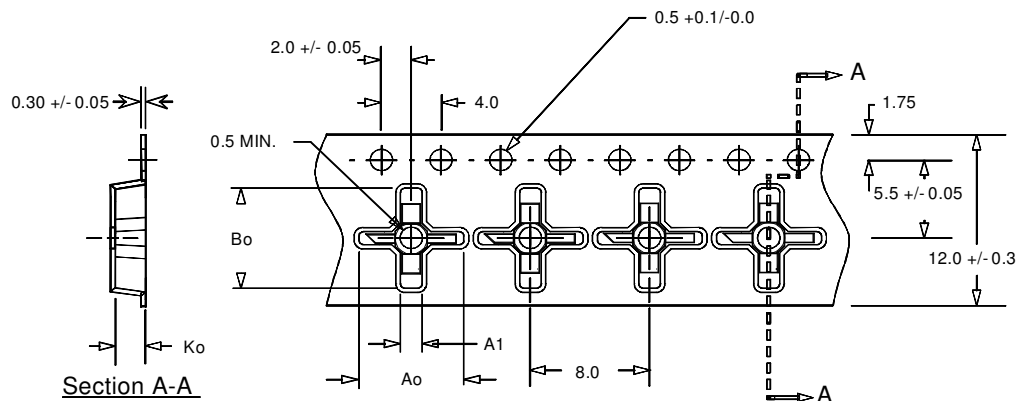
 V_{DS} = 2 V, I_{DS} = 10 mA


	S11		S21		S12		S22	
(GHz)	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
2	0.9628	-42.01	3.6830	141.51	0.0369	60.76	0.7839	-23.66
3	0.9290	-61.72	3.5155	123.73	0.0512	47.51	0.7662	-35.92
4	0.8850	-78.83	3.3714	107.39	0.0632	36.12	0.7479	-45.77
5	0.8363	-95.16	3.2341	91.69	0.0727	25.30	0.7265	-55.17
6	0.7790	-109.98	3.1485	77.11	0.0800	15.65	0.7060	-64.15
7	0.7101	-125.31	3.1044	62.36	0.0862	4.83	0.6784	-73.69
8	0.6325	-141.60	3.0739	47.17	0.0901	-4.80	0.6513	-83.26
9	0.5336	-160.93	3.0671	31.34	0.0929	-16.52	0.6154	-90.94
10	0.4551	173.73	3.1463	15.00	0.0960	-25.42	0.5681	-100.85
11	0.3646	139.38	3.1229	-3.47	0.0975	-39.11	0.5247	-110.79
12	0.3414	96.27	3.1032	-22.28	0.0967	-51.12	0.4703	-124.31
13	0.3916	55.69	2.9852	-42.22	0.0921	-64.82	0.4424	-137.54
14	0.5021	30.09	2.7319	-60.52	0.0914	-77.33	0.4033	-153.71
15	0.6006	5.98	2.4944	-79.87	0.0864	-92.13	0.3775	-171.58
16	0.6761	-12.09	2.2205	-98.64	0.0840	-106.37	0.3620	170.12
17	0.7365	-25.55	1.9949	-115.65	0.0822	-122.68	0.3602	155.01
18	0.7802	-36.92	1.7959	-130.79	0.0795	-137.17	0.3676	139.99
19	0.7052	52.24	1.7062	-147.01	0.0777	-152.27	0.3657	126.42
20	0.8127	77.07	1.6240	-167.27	0.076	-171.48	0.3638	114.17
21	0.8454	111.26	1.5510	-171.16	0.0742	-168.26	0.3610	102.1
22	0.8076	160.01	1.4788	-151.24	0.0727	-150.48	0.3601	02.1
23	0.9674	127.48	1.4071	133.82	0.0711	134.58	0.3583	84.07
24	0.0051	88.22	1.334	118.32	0.0605	120.36	0.3565	75.02

TYPICAL SCATTERING PARAMETERS (T_A=25 °C)

 V_{DS} = 6 V, I_{DS} = 25 mA


FREQUENCY (GHz)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
2	0.9466	-45.27	4.7204	138.76	0.0290	61.77	0.7774	-22.86
3	0.8992	-66.27	4.4365	120.08	0.0396	48.23	0.7580	-34.56
4	0.8408	-84.20	4.1742	103.05	0.0477	37.94	0.7395	-43.57
5	0.7773	-101.14	3.9371	86.89	0.0537	28.59	0.7191	-52.08
6	0.7030	-116.48	3.7614	71.87	0.0586	20.40	0.7011	-60.22
7	0.6246	-132.27	3.6415	57.05	0.0609	12.76	0.6793	-68.36
8	0.5210	-149.31	3.5115	41.83	0.0639	5.41	0.6598	-76.76
9	0.4356	-170.31	3.4665	26.02	0.0625	-1.28	0.6438	-83.16
10	0.3339	162.28	3.4607	10.46	0.0689	-7.68	0.6037	-90.66
11	0.2823	123.36	3.4022	-7.55	0.0685	-14.81	0.5905	-99.89
12	0.2873	75.57	3.3375	-25.01	0.0733	-24.74	0.5557	-110.39
13	0.3712	40.99	3.2126	-43.89	0.0722	-34.16	0.5615	-124.83
14	0.4997	21.87	2.8277	-61.45	0.0769	-55.60	0.5292	-140.37
15	0.5974	0.68	2.5760	-80.86	0.0754	-69.38	0.5056	-159.87
16	0.6783	-15.81	2.3064	-99.52	0.0733	-86.29	0.4924	-177.54
17	0.7357	-28.35	2.0749	-116.62	0.0726	-98.81	0.4759	165.28
18	0.7748	-38.97	1.8691	-131.76	0.0701	-118.72	0.4796	149.77
19	0.7917	-52.56	1.7758	-148.86	0.0676	-135.04	0.4625	125.71
20	0.8236	-73.62	1.6912	-168.18	0.0652	-155.66	0.4470	122.07
21	0.8567	-101.10	1.6151	-160.08	0.0630	-178.24	0.4228	111.42
22	0.9007	-130.00	1.5201	-150.44	0.0607	-155.80	0.4182	100.07
23	0.9503	-168.8	1.4645	-123.15	0.0586	-136.13	0.4041	81.40
24	0.9918	-122.70	1.3884	-117.85	0.0565	-118.88	0.3905	82.0

OUTLINE DIMENSIONS (Unit: inch)

Tape & Reel Package Orientation (Unit: mm)


Ao = 7.0 mm
 A1 = 1.45 mm
 Bo = 7.0 mm
 B1 = 0.9 mm
 Ko = 2.0 mm

Standard Reel Size	7"
Standard Reel Quantity	1000