

TRIPLE BAND COMBINER

PART NO. : WV-TBC-080918-4D-01

◆ APPLICATION

- > Integrates Wireless Bands(790MHz~862MHz,880MHz~960MHz, 1710MHz~1880MHz)
- > Designs for Co-siting systems
- > Outdoor Application

◆ FEATURE

- > High Reliability
- > **RoHS Compliant**
- > IP68-classified

◆ ELECTRICAL SPECIFICATION

ITEM	SPECIFICATION		
	PORT A 800	PORT B 900	PORT C 1800
Frequency Range	790MHz ~ 862MHz	880MHz ~ 960MHz	1710MHz ~ 1880MHz
Bandwidth	72MHz	80MHz	170MHz
Optional Port C	-	-	1920MHz~2170MHz (1710MHz~2170MHz)
Insertion Loss	0.4dB Max @ Port A to E & Port B to E & Port C to E		
VSWR	1.2:1 Max		
PIMD1	3rd Order Intermodulation Products < -160dBc. Filter location: Site room Input frequencies: 800 MHz, 900 MHz, 1800 MHz Requirements shall be fulfilled for all possible combinations of frequencies, carrier types and input powers according to Table 1 below.		
PIMD2	Optional 3rd Order Intermodulation Products < -160dBc. Filter location: Site room Input frequencies: 800 MHz, 900 MHz, 1800 MHz, 2100 MHz Requirements shall be fulfilled for all possible combinations of frequencies, carrier types and input powers according to Table 2 below.		
Isolation	70dB Min @ (Port A to B)(Port A to C)(Port B to C)		
Power	Maximum Power Port A > 80W (at 50° C ambient temperature) Maximum Power Port B > 100W (at 50° C ambient temperature) Maximum Power Port C > 100W (at 50° C ambient temperature) Maximum Power per Unit > 280W (at 50° C ambient temperature) Optional : Maximum Power Port C > 160W (at 50° C ambient temperature) Optional : Maximum Power per Unit > 340W (at 50° C ambient temperature)		
DC Pass	All Path		
Surge Protection	10kA using 8/20us pulse		
In/Out Impedance	50 Ohms Nominal		

TRIPLE BAND COMBINER

Frequency	Port	RAT	# carriers	Input power per frequency (Watt)	System IM2 level (dBc) - Guaranteed	System IM2 level (dBc) - Typical	System IM3 level (dBc) - Guaranteed	System IM3 level (dBc) - Typical
800 MHz	A	LTE	1x10 MHz	60	-	-	150 @2tone-20W Input	160 @2tone-20W Input
900 MHz	B	LTE+GSM	1x10 MHz + 2	30 + 2x20 = 70				
1800 MHz	C	LTE+GSM	1x20 MHz + 2	30 + 2x20 = 70				

Table 1. Triplexer 800/900/1800 .

Frequency	Port	RAT	# carriers	Input power per frequency (Watt)	System IM2 level (dBc) - Guaranteed	System IM2 level (dBc) - Typical	System IM3 level (dBc) - Guarantee d	System IM3 level (dBc) - Typical
800 MHz	A	LTE	1x10 MHz	60	-	-	150 @2tone-20W Input	160 @2tone-20W Input
900 MHz	B	LTE+GSM	1x10 MHz + 2	30 + 2x20 = 70				
1800 MHz	C	LTE+GSM	1x20 MHz + 2	30 + 2x20 = 70				
2100 MHz	C	UMTS	3x5 MHz	60				


Table 2. Triplexer 800/900/1800 - 2100-Optional

◆ MECHANICAL SPECIFICATIONS


ITEM	SPECIFICATION
Dimension	262.0 x 263.0 x 60.0 Max (unit:mm)
Mounting Points	Wall or Pole
RF Connector	7 / 16 DIN Female Long Neck Connector
Connector Position	See Outline Drawing
Weight	Single : Apprx. 5.0Kgs Double : Apprx. 10.0Kgs
Finish	Gray color epoxy coating

TRIPLE BAND COMBINER

◆ OUTLINE DRAWING

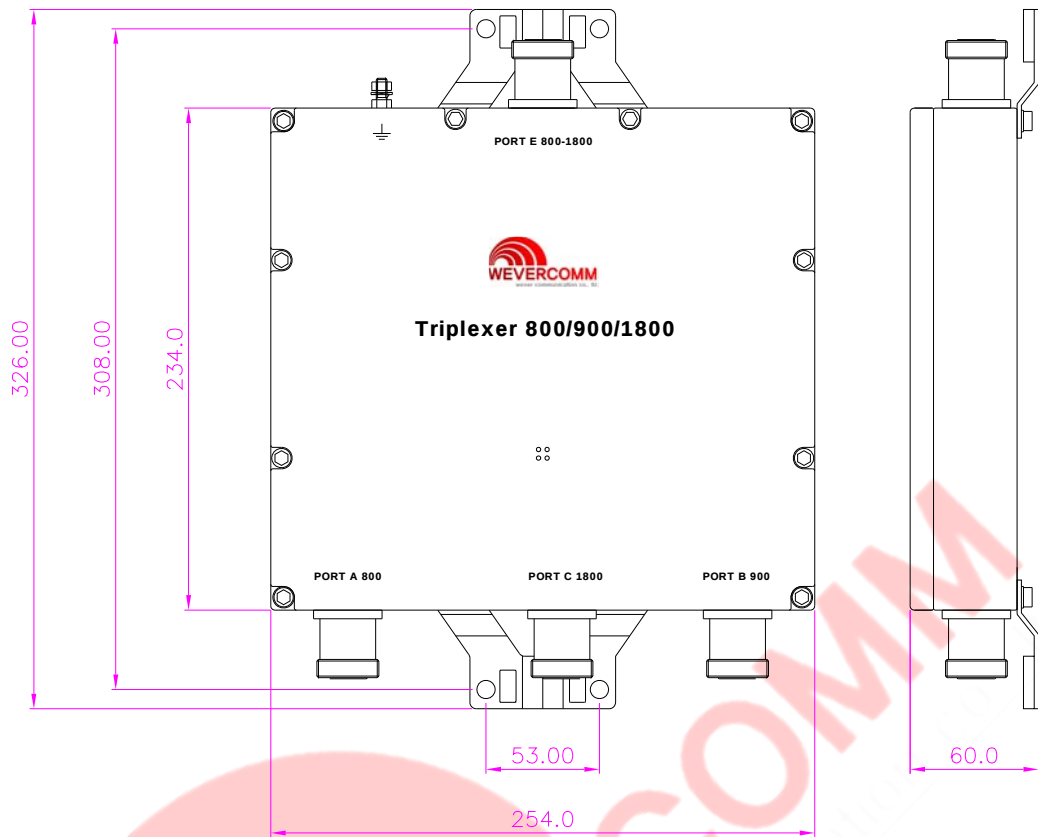

SINGLE (Part No. : WV-TBC-080918-4D-01-S)

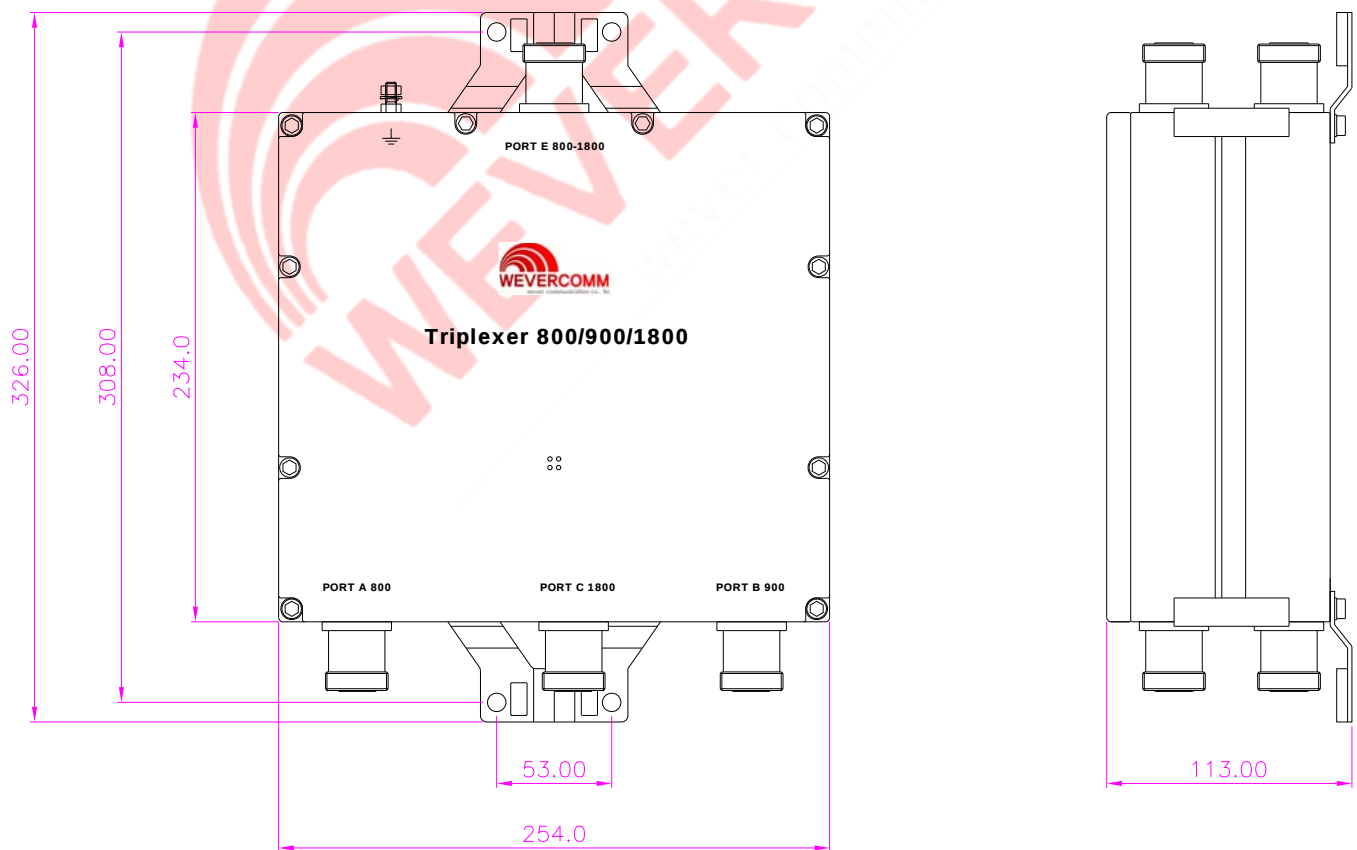

DUAL (Part No. : WV-TBC-080918-4D-01-D)