



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Name: SAW Filter 866 MHz (BW 2 MHz) SMD 2.0 x 1.6 mm

TST Parts No.: TA2034A

Customer Parts No.: _____

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Sam Lin 

Approval by: _____ Bob Chau 

Date: _____ 09/07/2016

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

SAW Filter 866MHz

MODEL NO.:TA2034A

REV. NO.:1

A. MAXIMUM RATING:



1. Input Power Level: 20 dBm
2. DC Voltage : 5V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C

RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:

Item	Unit	Min	Typical	Max
Center Frequency Fc	MHz	-	866	-
Insertion Loss (865 ~ 867 MHz) IL	dB	-	3.2	4.5
Amplitude Ripple (865 ~ 867 MHz)	dB	-	1.0	2.5
VSWR (865 ~ 867 MHz)	dB	-	1.3	2.0
Attenuation (Reference level from 0 dB)				
50 ~ 791 MHz	dB	45	55	-
791 ~ 848 MHz	dB	35	40	-
848 ~ 854 MHz	dB	30	35	-
873 ~ 883 MHz	dB	20	30	-
883 ~ 1000 MHz	dB	45	50	-

C.OUTLINE DRAWING:

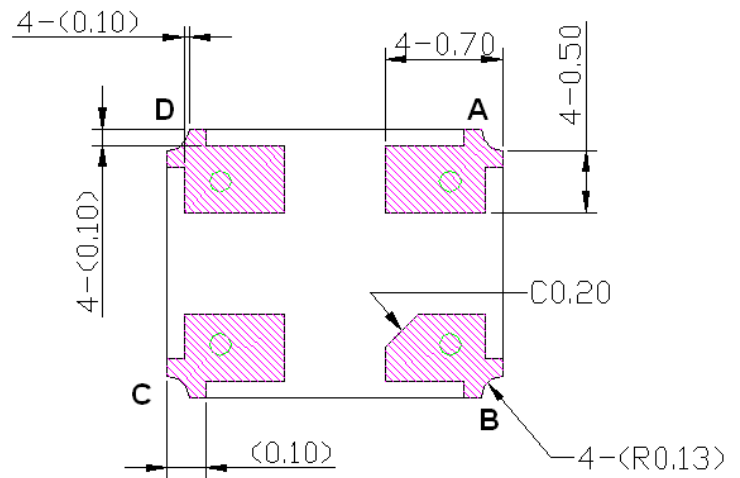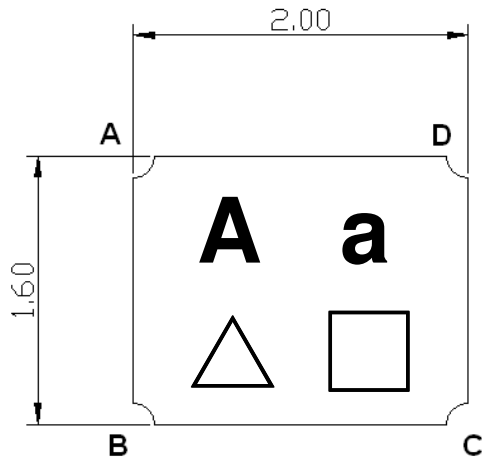


#B:	Input
#D:	Output
#A,C:	Ground
Unit:	mm


△: Year(2011:1)

□: Week(A~Z:Week01~26, a~z:Week27~52)

D. MEASUREMENT CIRCUIT:

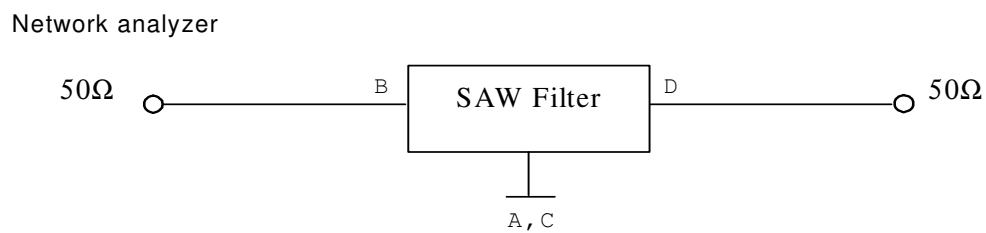


E. PCB Footprint:

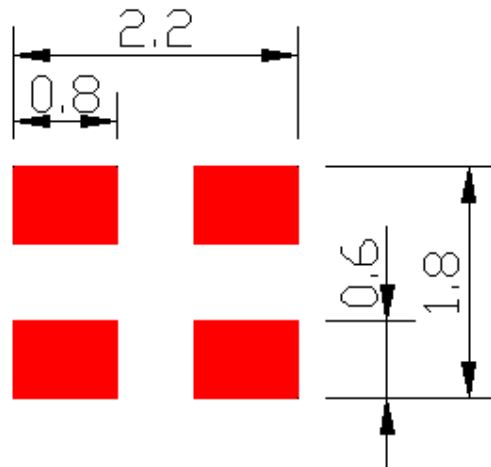


F. Frequency Characteristics : (Measure Demo board)


Frequency Response

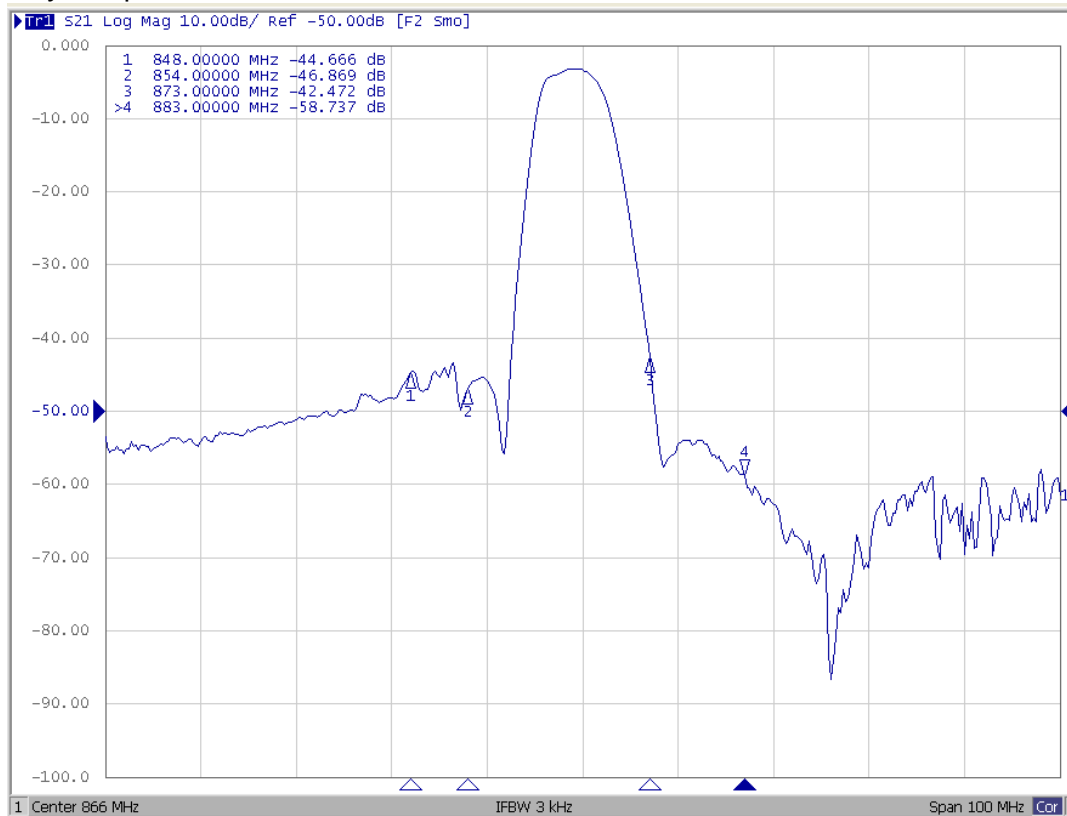


Wideband Response

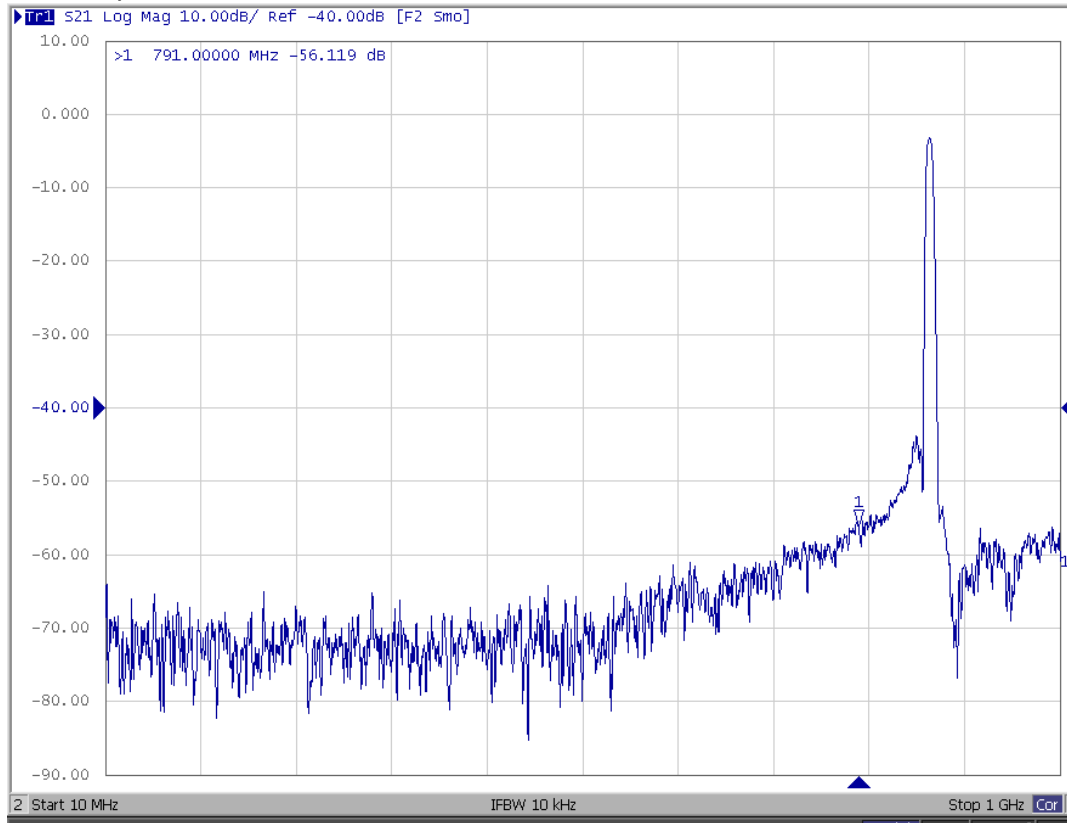

Passband Response

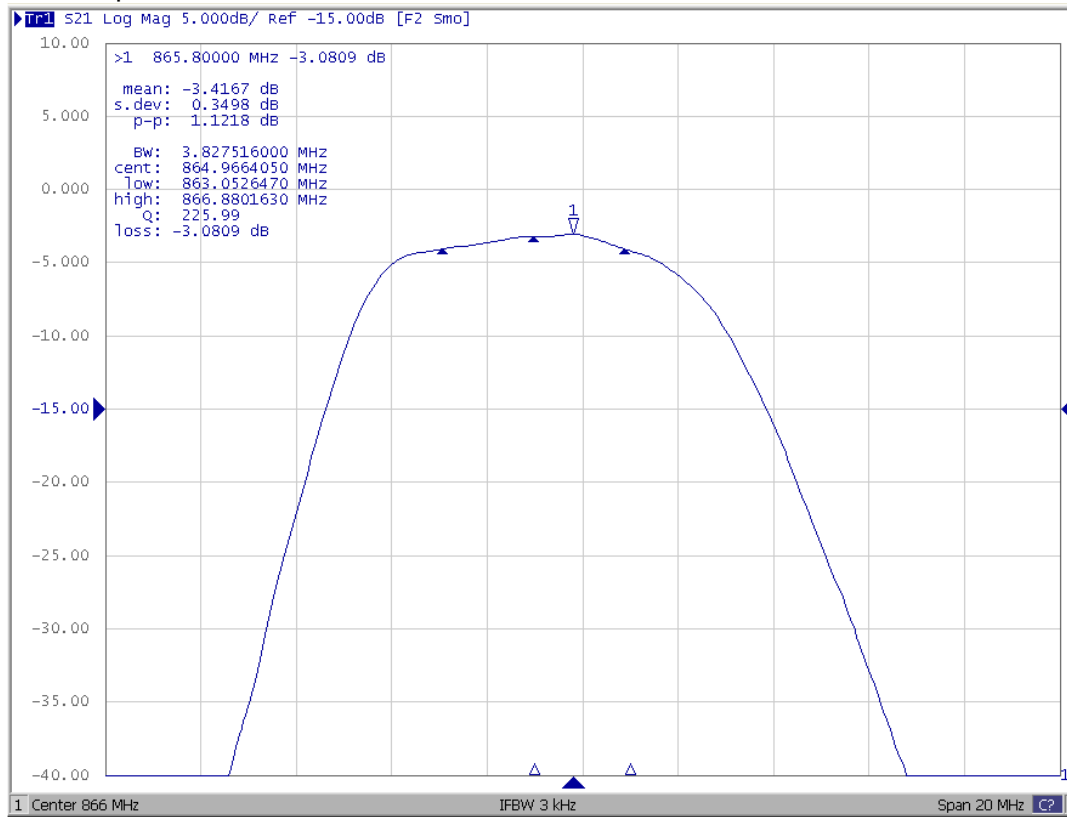


VSWR

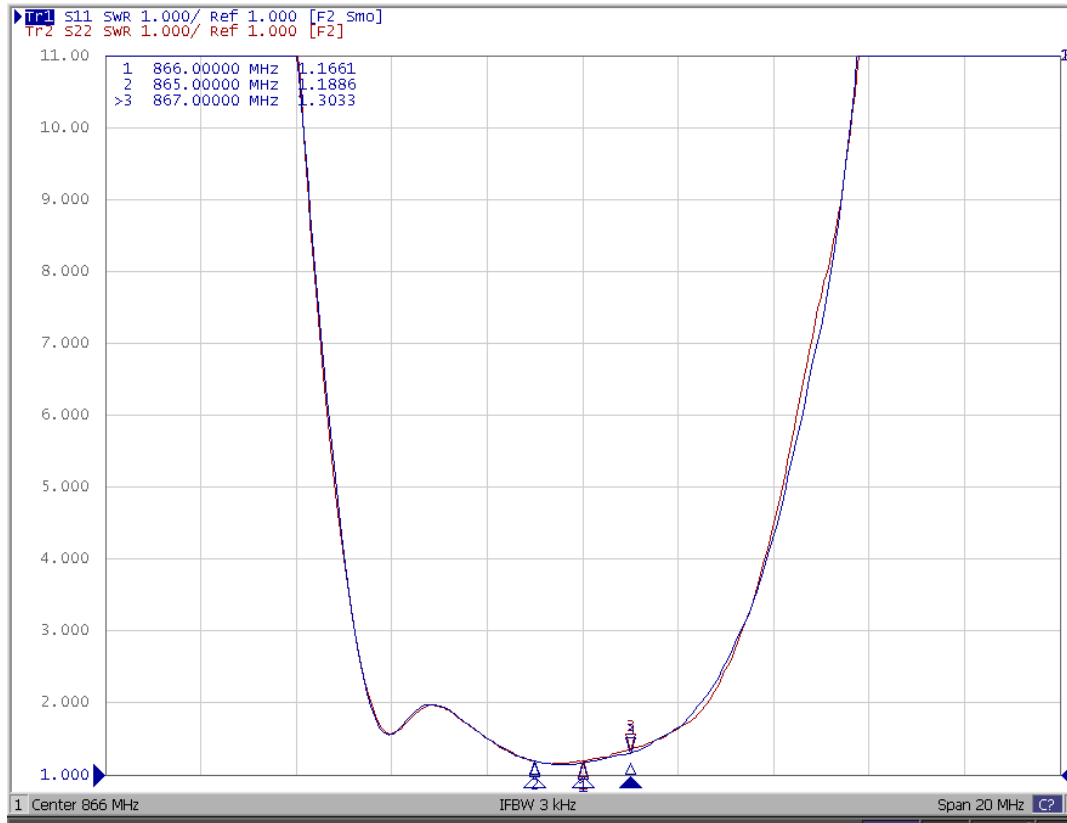


G. PACKING:

1. REEL DIMENSION

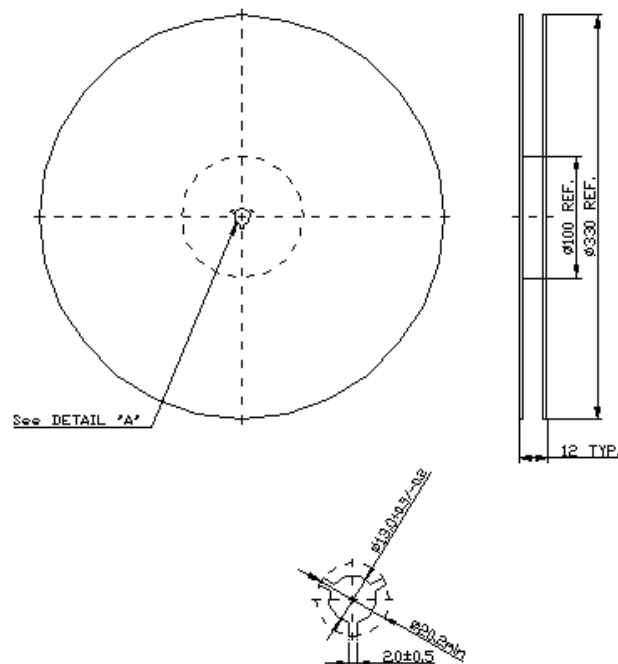

2. TAPE DIMENSION

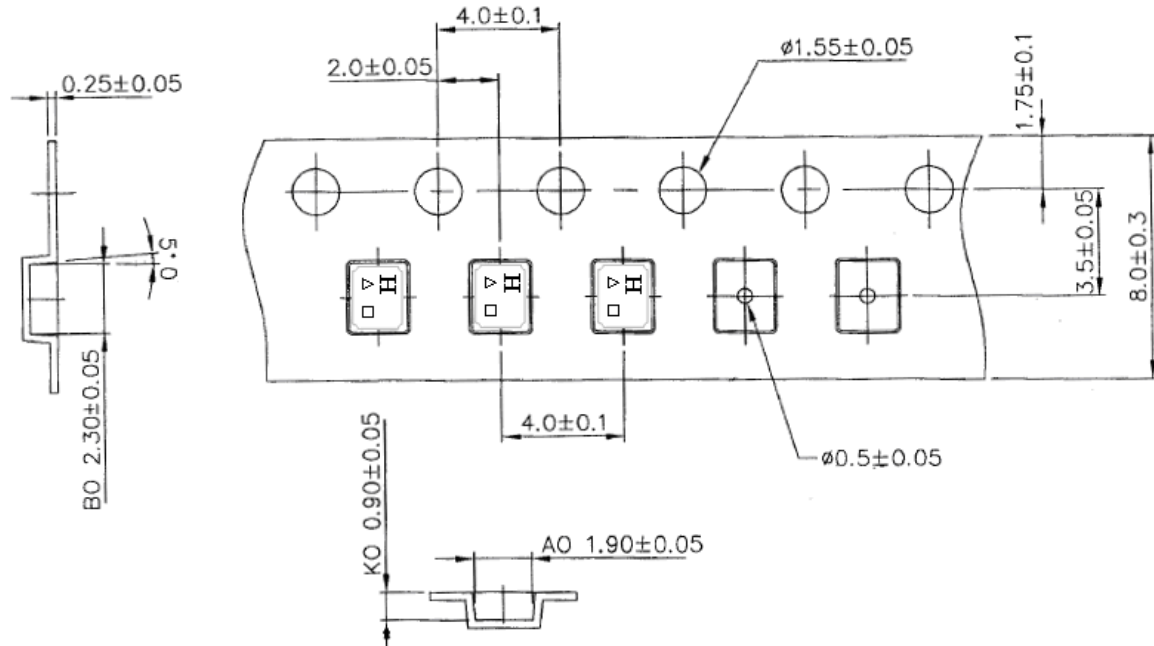

H. RECOMMENDED REFLOW PROFILE :

1. Preheating shall be fixed at 150~180℃ for 60~90 seconds.
2. Ascending time to preheating temperature 150℃ shall be 30 seconds min.
3. Heating shall be fixed at 220℃ for 50~80 seconds and at 260℃+0/-5℃ peak (20~40sec).
4. Time: 2 times.

